

ELAC

The life of sound.

Sensible Speaker Cables

A lamp deserves lamp cord. Your speakers deserve something better.

Designed to deliver full bandwidth and maximum conductivity without coloration or compromise, ELAC Sensible Speaker Cables are the most cost-effective improvement you can make to your system!



Sensible Speaker Cables

They're not only sensible, they're better.

Great sound. Great value. Only from ELAC



SENSIBLE SPEAKER CABLE FEATURES

14 AWG 99.99% oxygen-free copper conductors for superior sound quality.

Oxygen. It's the third most abundant element in the universe. That's OK for the universe, but not for your speaker cables. That's why our engineers specified four-nines (99.99%) oxygen-free copper to deliver maximum conductivity to your loudspeakers and maximum purity in your sound.

Premium, high-temperature, nylon-braided PVC jacket for easy handling.


There's nothing worse than cables that won't bend, stay put or lie flat. Sensible Speaker Cables have a durable braided jacket that withstands high-traffic environments and repeated handling. The sophisticated pattern makes these speaker cables a welcome addition to the best-looking systems.

Precision-formulated polyethylene dielectric for minimal signal interference.

It isn't just wire metallurgy that affects your sound—what covers the wire matters too. ELAC's polyethylene dielectric not only provides superior insulation, but it has a low dielectric constant as well as offering low dielectric loss. So your speakers receive the purest, cleanest-sounding signal imaginable.

Machined, high-conductivity beryllium copper contacts for maximum signal transfer.

While most affordable cables use inferior plated zinc connectors, ELAC insists on brass. Then those connectors are fitted with 24K gold-plated beryllium copper contacts for maximum conductivity and reliability of contact, while threaded anodized barrels won't come unscrewed during use.

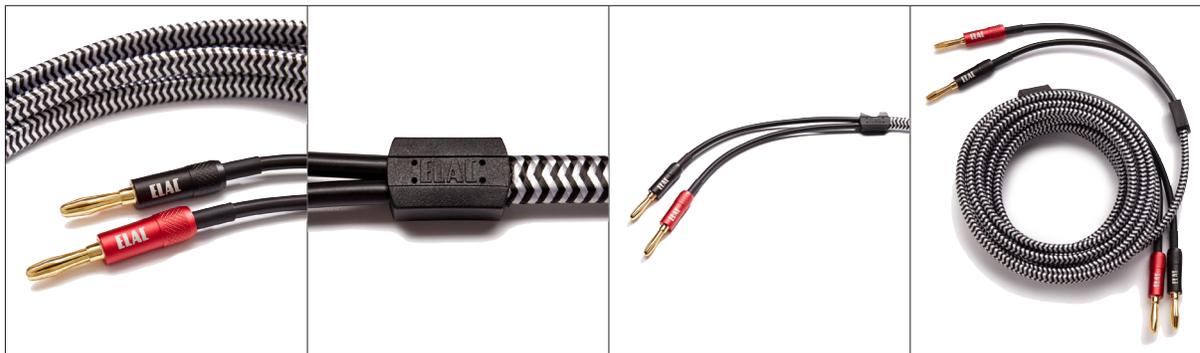

SPECIFICATIONS	SPW-10FT-P	SPW-15FT-P
	10 ft. Speaker Cable	15 ft. Speaker Cable
Gauge	14 AWG	14 AWG
Materials	99.99% oxygen-free copper conductors	99.99% oxygen-free copper conductors
Jacket	High-temperature, nylon-braided PVC jacket	High-temperature, nylon-braided PVC jacket
Insulation	Polyethylene dielectric	polyethylene dielectric
Connectors	24K gold-plated beryllium copper	24K gold-plated beryllium copper
Cable Count	Pair	Pair
Length	10 ft.	15 ft.
Net Weight (each)	08.10 oz	11.5 oz